User's Manual for Focal Reducer / Extender Corrector

Please install, according to the following steps, to make sure that the Reducer / Extender Corrector, you use, produces the best results.

The first step: Extend the focus tube out, as shown.

lock ring

The second step: Screw on the lock ring counterclockwise until it stops – do not tighten.

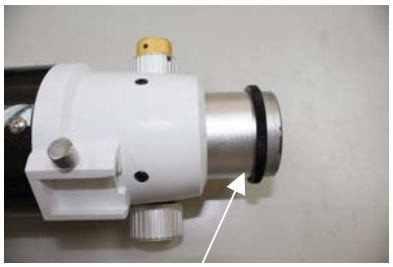

screw on to the leftmost stop

The third step: Screw the Reducer / Extender Corrector, onto the focusing tube, counterclockwise, until it stops – and tighten slightly.

rotate to the leftmost

The fourth step: Turn the lock ring to the right and tighten the Reducer / Extender Corrector.

tighten lock ring against Reducer / Extender Corrector

The fifth step: Please use SYNTA tailor-made camera adapter rings to ensure the largest aperture and the optimum imaging focus.

SYNTA tailor-made camera adapter ring

The sixth step: Connect your Single Lens Reflex Camera to the SYNTA tailor-made camera adapter ring.

attach SLR Camera body

The seventh step: While, very carefully, holding the camera body with one hand [or with the camera strap], slightly loosen the 3 set screws on the SYNTA camera adapter ring, and rotate the camera body to level it in the proper position. Then, retighten the 3 set screws.

Set screws (3pcs)

Now, you're ready to take pictures!